

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number  
**WO 2005/082499 A1**

(51) International Patent Classification<sup>7</sup>: **B01D 65/02**,  
65/08, 61/14, 63/02

(21) International Application Number:  
PCT/NL2005/000098

(22) International Filing Date: 10 February 2005 (10.02.2005)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:  
1025459 11 February 2004 (11.02.2004) NL

(71) Applicant (for all designated States except US): **FRIES-  
LAND BRANDS B.V.** [NL/NL]; P. Stuyvesantweg 1,  
NL-8937 AC Leeuwarden (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KROMPKAMP,  
Jantje** [NL/NL]; Amsterdamseweg 5, NL-6711 BE Ede  
(NL). **VAN DER PADT, Albert** [NL/NL]; Latonalaan

56, NL-7321 EA Apeldoorn (NL). **VAN DER VORST,  
Cornelis, Petrus, Jacobus, Maria** [NL/NL]; Laan van  
Klarenbeek 35, NL-6824 JL Arnhem (NL).


(74) Agent: **WINCKELS, J.H.F.**; Johan de Wittlaan 7,  
NL-2517 JR Den Haag (NL).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR MICRO OR ULTRAFILTRATION

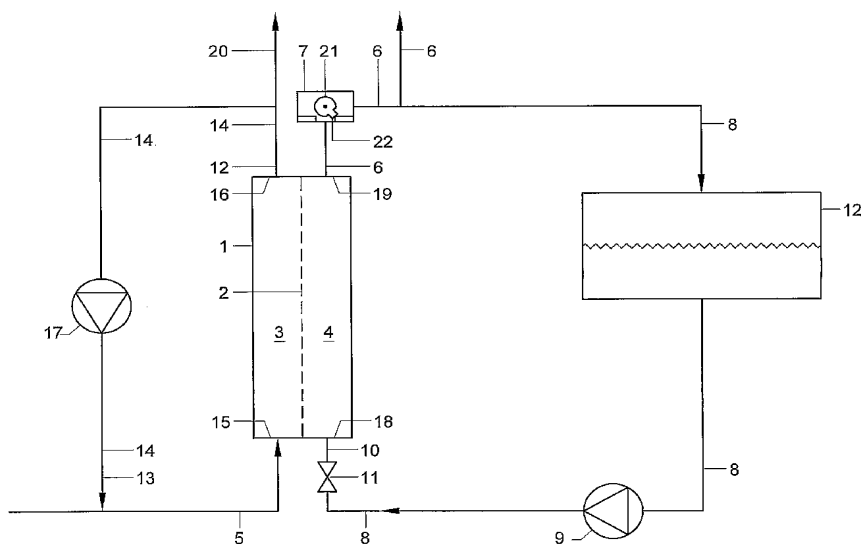

(57) Abstract: An apparatus provided with a micro or ultrafiltration filter, wherein the filter is provided with a filter housing having a retentate side and a permeate side, wherein the retentate side and the permeate side are separated from each other by filter material, wherein a fluid supply pipe is connected to the retentate side and a permeate discharge pipe to the permeate side, wherein, in the permeate discharge pipe, a shut-off valve operable at a high frequency is provided and wherein means are connected to the permeate side for increasing the pressure in the permeate side when the said shut-off valve is closed to a value which is higher than the pressure on the retentate side.

WO 2005/082499 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*